

# KSWISH2X4-39Y\_D10



LED efficiency and performance in an economical 2'x4' center basket troffer. Includes built in support for Lightcloud, a wireless lighting control system fully developed and supported by RAB.

Color: White

Weight: 23.1 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

## Driver Info

Type	Constant Current
120V	0.33A
208V	0.20A
240V	0.17A
277V	0.15A
Input Watts	38.9W
Efficiency	N/A

## LED Info

Watts	39W
Color Temp	3000K (Warm)
Color Accuracy	83 CRI
L70 Lifespan	100,000
Lumens	4,944
Efficacy	127.1 LPW

## Technical Specifications

### Listings

#### UL Listing:

Suitable for damp locations

#### DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities.

DLC Product Code: PTGKYW4P

#### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

#### Driver:

Class 2, Constant Current, 100-277V, 50/60Hz, 120V: 0.33A, 208V: 0.20A, 240V: 0.17A, 277V: 0.15A, THD <15%, Power Factor >90%, 4kV surge protection

#### THD:

4.0% at 120V, 7.6% at 277V

#### Power Factor:

99.8% at 120V, 95.1% at 277V

#### Construction

#### Ambient Temperature:

Suitable for 40°C (104°F)

#### IC Rating:

Suitable for direct contact with insulation

#### Housing:

Die-formed, 20-gauge, cold-rolled steel

#### Mounting:

Integral T-grid clips make installation easy and secure

#### Reflector:

High-reflectance, powder-coated finish, optimized for uniform light distribution

#### Lens:

Snap-in, frosted polycarbonate lens

#### Finish:

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### LED Characteristics

#### LEDs:

Long-life, high-efficacy surface mount LEDs

#### Lifespan:


100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Color Stability:

LED color temperature is warrantied to shift no more than 200K in CCT over a 5-year period

# KSWISH2X4-39Y\_D10

## Dimensions

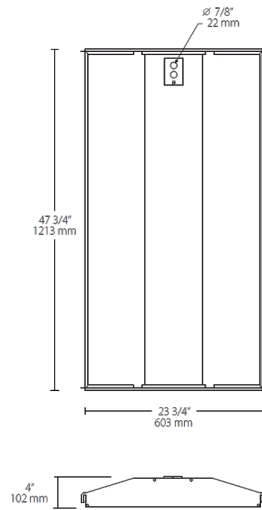

## Features

- Ultra-efficient performance with DLC Premium listing
- Optional surface mount and drywall frame kits available
- Optional programmable occupancy sensor for multi-level lighting control
- 0-10V dimming standard on all models
- 100,000-hour LED lifespan <CALLLOUT> 5-Year, No-Compromise Warranty

## Ordering Matrix

Family	Size	Wattage	Color Temp	Driver	Options	Chicago Penum
KSWISH	2X4	39	Y	/D10	^	^
	2X4 = 2' x 4'	19 = 19W (2x2)	N = 4000K (Neutral) YN = 3500K (Warm Neutral)	/D10 = 0-10V Dimming	Blank = No Option /E2 = Emergency Battery Backup /LC = Lightcloud Controller /MVS = Occupancy Sensor /MVS/E2 = Occupancy Sensor + Emergency Battery Backup	Blank = Standard /CP = Chicago Plenum
	2X2 = 2' x 2'	29 = 29W (2x2)	Y = 3000K (Warm)			
		39 = 39W (2x4)				
		49 = 49W (2x4)				